

KNX IP Router 750

IP-Router / Interface between LAN and KNX bus

Data sheet

Application area

The KNXnet/IP router allows forwarding of telegrams between different lines through a LAN (IP) as a fast backbone.

In addition this device is suited to connect a PC to the KNX network e.g. for ETS programming.

The IP address can be obtained by a DHCP server or by manual configuration (ETS) respectively.

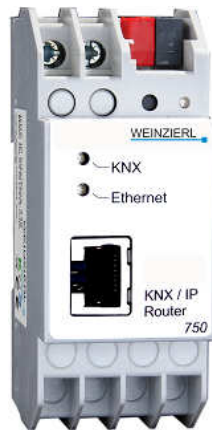


Figure 1: Photo of device

This device works according to the KNXnet/IP specification using the core, the device management, the tunnelling and the routing part.

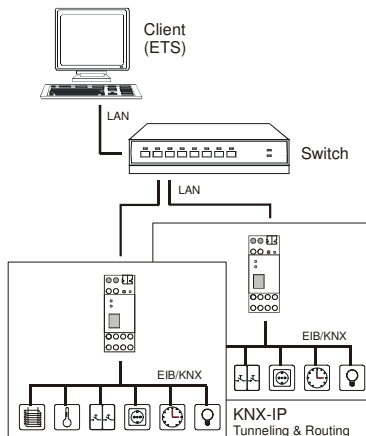


Figure 2: Typical application

The KNX IP Router 750 has a filter table and is able to buffer up to 150 telegrams.



Weinzierl Engineering GmbH
 D-84508 Burgkirchen / Alz
 Germany
<http://www.weinzierl.de>
info@weinzierl.de

Technical data

Electrical safety

- Protection (acc. EN 60529): IP 20
- Safety extra low voltage SELV DC 29 V

CE marking according to

- Low voltage directive 2014 / 35 / EU
- EMC directive 2014 / 30 / EU
- RoHS directive 2011 / 65 / EU (RoHS2)
 EN 50491-3: 2009, EN 50491-5-1: 2010
 EN 50491-5-2: 2010, EN 50491-5-3: 2010
 EN 61000-6-2: 2005
 EN 61000-6-3: 2007 + A1: 2011
 EN 50581: 2012 (RoHS2)

*CE declaration can be requested at info@weinzierl.de.

Environmental requirements

- Ambient temp. operating: - 5 ... + 45 °C
- Ambient temp. non-op.: - 25 ... + 70 °C
- Rel. humidity (non-condensing): 5 % ... 93 %

Mechanical data

- Housing: Plastic
- DIN rail mounted device, width: 2 units
- Weight: approx. 100 g

Operating controls

- Learning key for KNX

Indicators

- Learning-LED (red)
- Signal-LED (green) for KNX
- Signal-LED (green) for LAN

Ethernet

- 10BaseT (10Mbit/s)
- Supported internet protocols ARP, ICMP, IGMP, UDP/IP, TCP/IP, DHCP and Auto IP
- Up to 5 KNXnet/IP Tunneling conn. simultaneously

Power supply

- External supply 12-24 V AC / 12-30 V DC
- Alternative: "Power-over-Ethernet"
- Power consumption: < 800 mW

Connectors

- KNX connection terminal
- LAN RJ-45 socket
- Screw connector for power supply