

Power supply AC 24 V ~  
Art. No. WSSV10

## Operating instructions

### 1 Safety instructions

Electrical equipment may only be installed and fitted by electrically skilled persons.

Failure to observe the instructions may cause damage to the device and result in fire and other hazards.

Danger of electric shock. During installation and cable routing, comply with the regulations and standards which apply for SELV circuits.

These instructions are an integral part of the product, and must remain with the end customer.

### 2 Function

#### Intended use

- Supplying devices with 24 V AC
- Mounting on DIN rail according to EN 60715 in distribution boxes

#### Product characteristics

- Two internally connected 24 V outputs
- Overload and short-circuit protection via thermo switch

### 3 Information for electrically skilled persons

#### 3.1 Fitting and electrical connection

##### Fitting the device

---

**DANGER!**

Electrical shock when live parts are touched.

Electrical shocks can be fatal.

**Before working on the device, disconnect the power supply and cover up live parts in the working environment.**

---

Observe the temperature range. Ensure sufficient cooling.

- Mount device on DIN rail.

## Connecting the device

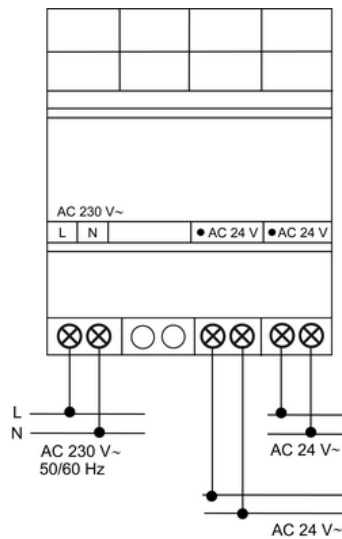


Figure 1

- Connect the device according to the connection diagram (figure 1).

## 4 Appendix

### 4.1 Technical data

Rated voltage	AC 230 V ~
Mains frequency	50 / 60 Hz
Output current	max. 1 U
Output voltage	AC 24 V
Storage/transport temperature	-25 ... +70 °C
Ambient temperature	-5 °C ... +40 °C
Relative humidity	max. 93 % (No moisture condensation)
Weight	approx. 550 g
Fitting width	72 mm / 4 modules
Connection mode	Screw terminal
single stranded	0.5 ... 4 mm <sup>2</sup>
finely stranded with conductor sleeve	0.14 ... 2.5 mm <sup>2</sup>
finely stranded without conductor sleeve	0.34 ... 4 mm <sup>2</sup>

### 4.2 Troubleshooting

#### Power has failed.

Short-circuit and overload protection has activated.

Check for overload.

Check output cable for short-circuit.

- Automatic restart after cooling off or elimination of short-circuit.

### 4.3 Warranty

We reserve the right to make technical and formal changes to the product in the interest of technical progress.

We provide a warranty as provided for by law.

Please send the unit postage-free with a description of the defect to our central customer service office.

Power supply AC 24 V ~

**JUNG**

---

**ALBRECHT JUNG GMBH & CO. KG**

Volmestraße 1  
58579 Schalksmühle

Telefon: +49.23 55.8 06-0  
Telefax: +49.23 55.8 06-2 04  
kundencenter@jung.de  
www.jung.de

**Service Center**

Kupferstr. 17-19  
44532 Lünen  
Germany