


LED ALUMINIUM PROFILES & EXTRUSIONS



DATA SHEET

LED PROFILE

ODEL

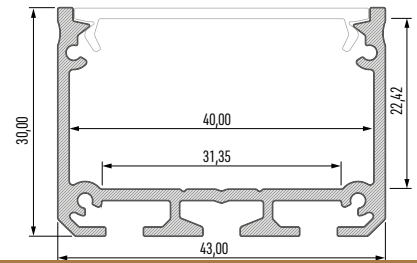

PROFILE ODEL

	White (lacquered)	Silver (anodized)
Dimensions	1000mm, 2020mm, 3000mm	
LED strip width	3 x 10mm	
Application	For lighting in offices, stores and homes - hanging, architectural lighting.	

Covers (PVC/PMMA/PC)

Dimensions: 1000mm, 2020mm, 3000mm

Transparent	Frosted	Milky	Frosted	Milky Frosted	Transparent
WIDE					PRISMATIC PC
<ul style="list-style-type: none"> ✦ PMMA 94% ✦ PVC 85% ✦ PC 91% 	<ul style="list-style-type: none"> ✦ PMMA 73% ✦ PVC 55% ✦ PC 63% 	<ul style="list-style-type: none"> ✦ PMMA 42% ✦ PVC 28% ✦ PC 29% 	<ul style="list-style-type: none"> ✦ PMMA 81% 	<ul style="list-style-type: none"> ✦ PMMA 74% 	<ul style="list-style-type: none"> ✦ PC 87%

End caps for LED profile ODEL (aluminium)

	With a hole		Without a hole	
	White	Silver	White	Silver
ALU				
ABS				

Accessories

Straight connector	Angular connector 90°	Angular transverse connector 90°	Angular connector 120°
Mounting profile MODI	Mounting springs	Pendants	

Maximum dissipated power of LED light sources for temperature profile 55°C: 55.5W with cover, 66W without cover.
For temperature profile 65°C: 70.5W with cover, 85W without cover.