


LED ALUMINIUM PROFILES & EXTRUSIONS



DATA SHEET

LED PROFILE

SILO






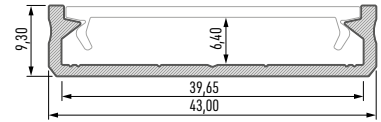


PROFILE SILO









	White	Black (anodized)	Inox (anodized)	Silver (anodized)	Raw
					
Dimensions	1000mm, 2020mm, 3000mm				
LED strip width	3 x 10mm				
Application	Surface mounted profile - for household and office room illumination - hanging lighting.				

Covers (PVC/PMMA/PC)

Dimensions: 1000mm, 2020mm, 3000mm

Transparent	Frosted	Milky	Frosted	Milky Frosted	Transparent
WIDE					PRISMATIC PC
					
✦ PMMA 94%	✦ PMMA 73%	✦ PMMA 42%	✦ PMMA 81%	✦ PMMA 74%	
✦ PVC 85%	✦ PVC 55%	✦ PVC 28%			
✦ PC 91%	✦ PC 63%	✦ PC 29%			✦ PC 87%

End caps for LED profile SILO (aluminium and plastic)

With a hole				Without a hole			
White	Black	Inox	Silver	White	Black	Inox	Silver
							

Accessories



Maximum dissipated power of LED light sources for temperature profile 55°C: 24.6W with cover, 27W without cover.
For temperature profile 65°C: 33.9W with cover, 36.6W without cover.