


## Description

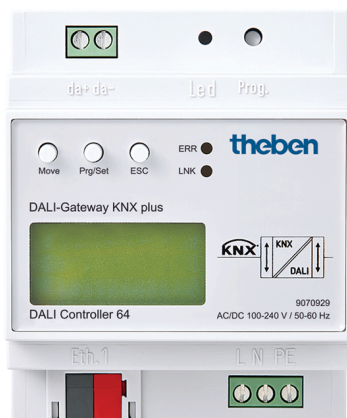

- The DALI Gateway KNX serves as an interface between the the DALI and the KNX system
- A maximum of 64 DALI members can be connected to a DALI output
- Individual control of up to 64 ECGs possible
- Up to 16 groups can be switched, dimmed or set to a defined value
- Operation of single battery emergency lamps according to EN 62386-202
- Emergency lighting systems with central battery are also supported
- Status and error information for a
  - visualization
  - Scene module for up to 16 different groups
  - Effect module for sequencers
- LC display (2x 12 characters) for menu guidance during start-up and parameter settings
- The DALI start-up takes place via the control elements on the device, via the integrated web server or via the ETS plug-in

## Technical data

Operating voltage KNX	Bus voltage, <10 mA
Operating voltage	100 – 240 V AC/DC
Frequency	50 – 60 Hz
Width	4 modules
Installation type	DIN rail
Type of connection	Terminal screws   Bus connection: KNX bus terminal
Ambient temperature	-5 °C ... +45 °C
Stock temperature	-25 °C ... +70 °C
Protection class	I
Type of protection	IP 20