


Description

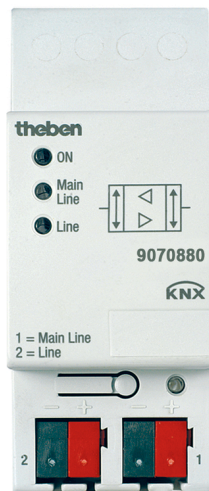

- Line coupler
- For connecting KNX lines or areas
- Galvanic separation of the lines/areas
- Bus terminals for main line and subordinate line
- Telegrams can be filtered (to reduce telegram traffic)
- Can also be used as line amplifier (repeater)

Technical data

Operating voltage KNX	Bus voltage, ≤10 mA
Operating voltage	24 V DC
Width	2 modules
Installation type	DIN rail
Type of connection	KNX bus terminal
Ambient temperature	-5 °C ... +45 °C
Stock temperature	-25 °C ... +55 °C
Protection class	III
Type of protection	IP 20

Scale drawings

