


Description

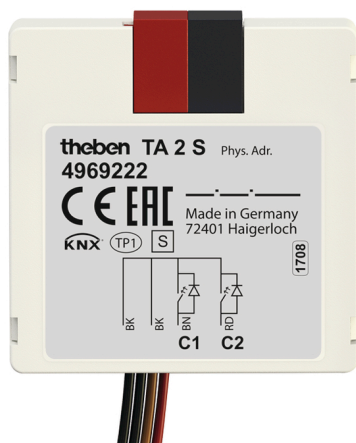

- Binary input/binary output sensor interfaces
- 2-way key interface
- 4-pole cable connection
- Free allocation of functions: Switch/key, dimming, blinds, valuator, sequences, controlling LED
- Can be installed in flush-mounted sockets with conventional sensors/ switches
- Flexible LED controlling, thanks to increased output current of 3 mA commercially available LEDs and low current LEDs can be controlled
- Inputs can be reconfigured to outputs with parameterizable flashing and pulsing function
- Colour coding of wiring pairs

Technical data

Operating voltage KNX	Bus voltage, ≤10 mA
Installation type	in flush-mounted socket
Type of connection	KNX bus terminal
Number of inputs	2
Max. cable length	30 m
Length connecting wires	25 cm
Contact voltage	5 V
Contact current	0,5 mA
Reaction in case of bus recovery	Adjustable
Ambient temperature	-5 °C ... +45 °C
Type of protection	IP 20
Protection class	III

Scale drawings

